



L形側溝

L形

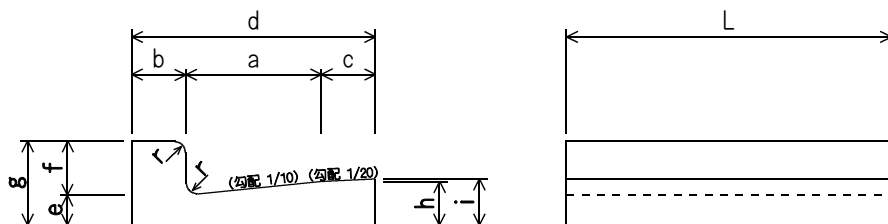


すり付け型(斜)

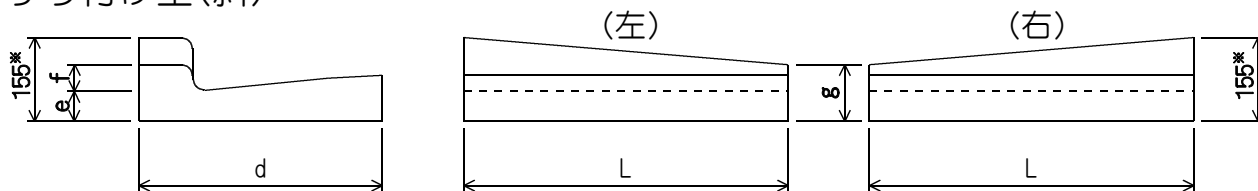

※ 無筋コンクリート製品の寸法は175mmとする。

切り下げ型(平)

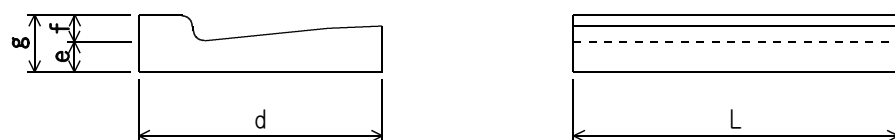

種類	呼び	寸法										参考重量(kg)	
		a	b	c	d	e	f	g	h	i	r		L
無筋	250A	250	100	-	350	75	100	175	100	-	20	600	57
	250A(斜 50)	250	100	-	350	75	50	125	100	-	20	600	53
	250A(平 50)	250	100	-	350	75	50	125	100	-	20	600	50
	250B	250	100	100	450	75	100	175	100	105	20	600	72
	250B(斜 20)	250	100	100	450	75	20	95	100	105	20	600	66
	250B(平 20)	250	100	100	450	75	20	95	100	105	20	600	60
	250B(斜 50)	250	100	100	450	75	50	125	100	105	20	600	68
	250B(平 50)	250	100	100	450	75	50	125	100	105	20	600	65
1種	250A	250	100	-	350	55	100	155	80	-	20	600	47
	250A(斜 50)	250	100	-	350	55	50	105	80	-	20	600	43
	250A(平 50)	250	100	-	350	55	50	105	80	-	20	600	40
	250B	250	100	100	450	55	100	155	80	85	20	600	59
	250B(斜 20)	250	100	100	450	55	20	75	80	85	20	600	53
	250B(平 20)	250	100	100	450	55	20	75	80	85	20	600	47
	250B(斜 50)	250	100	100	450	55	50	105	80	85	20	600	55
	250B(平 50)	250	100	100	450	55	50	105	80	85	20	600	52
	300	300	100	100	500	55	100	155	85	90	20	600	65
	300(斜 20)	300	100	100	500	55	20	75	85	90	20	600	56
	300(平 20)	300	100	100	500	55	20	75	85	90	20	600	53
	300(斜 50)	300	100	100	500	55	50	105	85	90	20	600	61
	300(平 50)	300	100	100	500	55	50	105	85	90	20	600	58
350	350	100	100	550	55	100	155	90	95	20	600	72	